


# GRP Support Solutions for Corrosive, Mining & Renewables

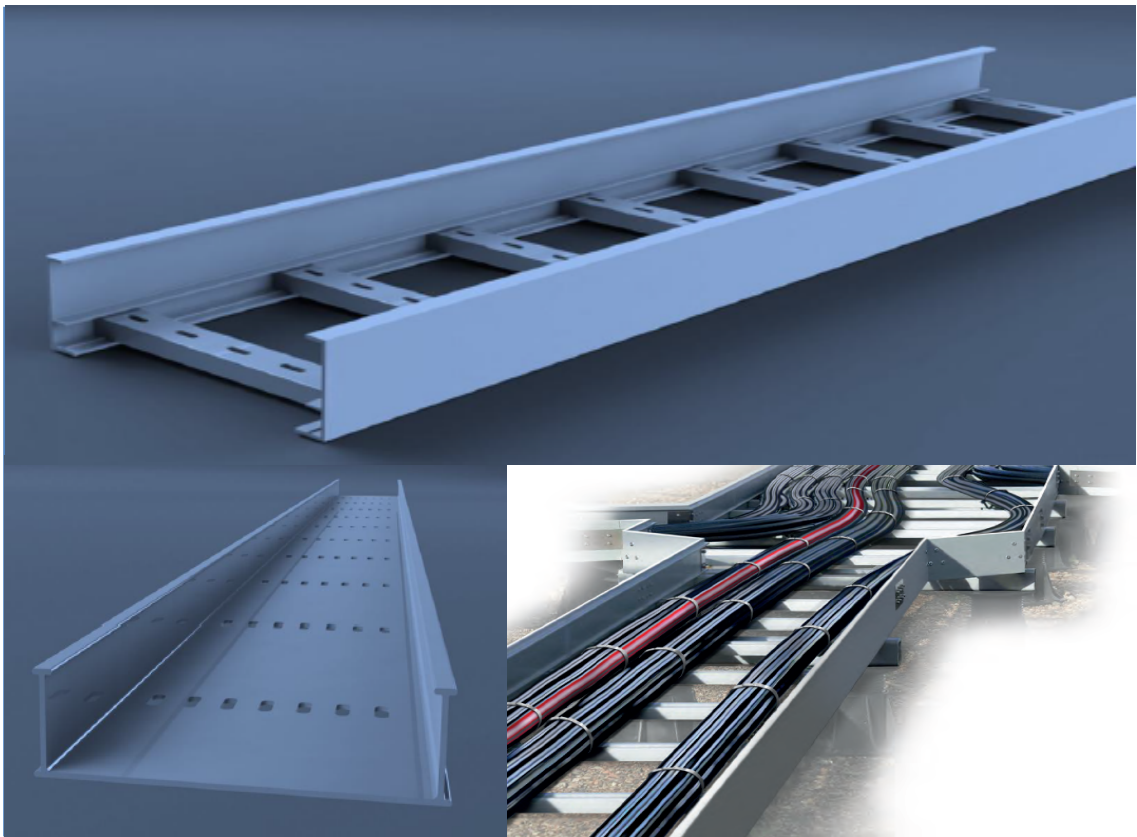

# GRP Cable Systems

Our GRP Cable Trays have been design and manufactured with the user in mind, whilst offering excellent performance ease of use. The Cable Trays can be supplied in a variety of sizes along with a comprehensive array of fittings to cater for any project large or small. Our Cable Trays can be supplied either as the tray or with the uniquely designed 'Click-fit-Lid'. All our trays are produced in 3mtr lengths and can easily be fabricated on/off site.

## Advantages

Corrosion Resistant	Impact Resistant
Strong & Lightweight	Click Fit Lid System
Non-Conductive	Easy to fabricate
Dimension Stability	UV Stability
Excellent Working Temperatures	

## Markets

Renewable Energy	Industrial
Rail	Mining
Marine/Coastal	Construction
Chemical Plant	Water Industry



# GRP Cable Trays

GRP Cable Trays at a glance		
	Standard	Alternative
Material	ISO Polyester Resin	
Fire Rating	Class 2 Fire Rated	Modar
Length	3000mm	6000
Width	50-300mm	
Type	Slotted	Plain

## Specifications

The cable trays are manufactured glass fibre by the pultrusion process from isophthalic polyester thermosetting resin reinforced with E glass, giving a high strength dimensionally accurate and thermally stable product. The pultruded sections fully comply with all the requirements of EN13706, grade E17 – Specification of pultruded profiles.

The standard polyester resin is a halogen free fire retardant grade satisfying the requirements of BS476 Pt7, Class 2 and ASTM E84 25 sec - Surface spread of flame. Higher grade fire retardant products can be manufactured to order including the high fire resistance, low smoke and low toxicity required by the London Underground (LUL). Cable Trays can also be made to order in the highly corrosion resistant vinyl ester resin.

GRP cable trays are normally electrical non-conductive but for those applications with risk explosive atmospheres an anti-static version is available to order.

The cable tray is slotted along the length the cable tray also has a unique accepting slot that allows couplers to be inserted with ease insitu. All cable trays have a bespoke click fit lid.

## Cable Tray (without cover) distributed load in Kg over the span

SPAN (M)	1	1.5	2	2.5	3
DEFLECTION (MM)	5	7.5	10	12.5	15
Tray	UDL in Kg at this span for deflection limited to span /200				
100x50	231	103	58	37	26
150x50	247	110	62	39	27
200x50	271	121	68	43	30
300x50	294	131	74	47	33

# GRP Cable Trays – Product Codes


Product	Width	Height	Kg/mtr
GRPCT50100/3	100mm	50mm	1.34
GRPCT50150/3	150mm	50mm	1.67
GRPCT50200/3	200mm	50mm	1.96
GRPCT50300/3	300mm	50mm	2.55
GRPCT80100/3	100mm	80mm	1.73
GRPCT80150/3	150mm	80mm	2.02
GRPCT80200/3	200mm	80mm	2.31
GRPCT80300/3	300mm	80mm	2.90

Product	Width	Products	Kg/each
GRPCTLD100/3	100mm	Fits 50/80	0.91
GRPCTLD150/3	150mm	Fits 50/80	1.22
GRPCTLD200/3	200mm	Fits 50/80	1.53
GRPCTLD100/3	100mm	Fits 50/80	0.91

Product	Width	Height	Kg/each
GRPFB90-50100	100mm	50mm	0.70
GRPFB90-50150	150mm	50mm	0.85
GRPFB90-50200	200mm	50mm	1.15
GRPFB90-50300	300mm	50mm	1.75
GRPFB90-80100	100mm	80mm	0.90
GRPFB90-80150	150mm	80mm	1.10
GRPFB90-80200	200mm	80mm	1.35
GRPFB90-80300	300mm	80mm	1.95


Product	Width	Height	Kg/each
GRPFB45-50100	100mm	50mm	0.70
GRPFB45-50150	150mm	50mm	0.85
GRPFB45-50200	200mm	50mm	1.15
GRPFB45-50300	300mm	50mm	1.75
GRPFB45-80100	100mm	80mm	0.90
GRPFB45-80150	150mm	80mm	1.10
GRPFB45-80200	200mm	80mm	1.35
GRPFB45-80300	300mm	80mm	1.95

## Tray & Lid

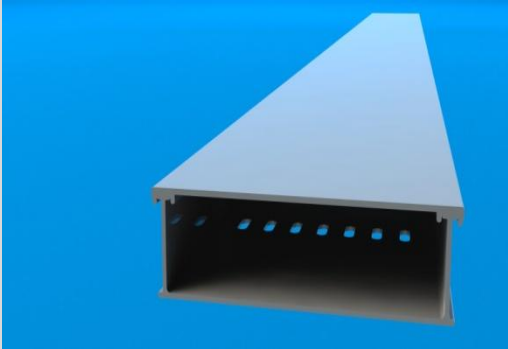

## Bends

Cable Tray 90° Bend

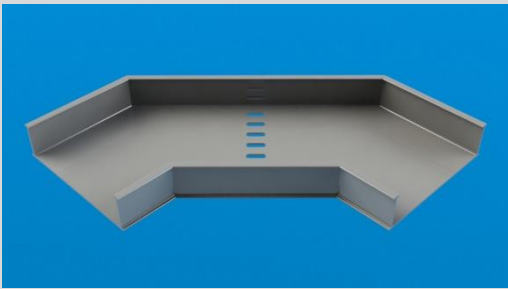

Cable Tray 45° Bend




Product	Width	Height	Kg/each
GRPEXTRSR90-50100	100mm	50mm	0.53
GRPEXTRSR90-50150	150mm	50mm	0.64
GRPEXTRSR90-50200	200mm	50mm	0.86
GRPEXTRSR90-50300	300mm	50mm	1.31
GRPEXTRSR90-80100	100mm	80mm	0.68
GRPEXTRSR90-80150	150mm	80mm	0.83
GRPEXTRSR90-80200	200mm	80mm	1.01
GRPEXTRSR90-80300	300mm	80mm	1.46

Product	Width	Height	Kg/each
GRPEXTRSR45-50100	100mm	50mm	0.53
GRPEXTRSR45-50150	150mm	50mm	0.64
GRPEXTRSR45-50200	200mm	50mm	0.86
GRPEXTRSR45-50300	300mm	50mm	1.31
GRPEXTRSR45-80100	100mm	80mm	0.68
GRPEXTRSR45-80150	150mm	80mm	0.83
GRPEXTRSR45-80200	200mm	80mm	1.01
GRPEXTRSR45-80300	300mm	80mm	1.46

Product	Width	Height	Kg/each
GRPINTRSR90-50100	100mm	50mm	0.53
GRPINTRSR90-50150	150mm	50mm	0.64
GRPINTRSR90-50200	200mm	50mm	0.86
GRPINTRSR90-50300	300mm	50mm	1.31
GRPINTRSR90-80100	100mm	80mm	0.68
GRPINTRSR90-80150	150mm	80mm	0.83
GRPINTRSR90-80200	200mm	80mm	1.01
GRPINTRSR90-80300	300mm	80mm	1.46


Product	Width	Height	Kg/each
GRPINTRSR45-50100	100mm	50mm	0.53
GRPINTRSR45-50150	150mm	50mm	0.64
GRPINTRSR45-50200	200mm	50mm	0.86
GRPINTRSR45-50300	300mm	50mm	1.31
GRPINTRSR45-80100	100mm	80mm	0.68
GRPINTRSR45-80150	150mm	80mm	0.83
GRPINTRSR45-80200	200mm	80mm	1.01
GRPINTRSR45-80300	300mm	80mm	1.46

## External Risers

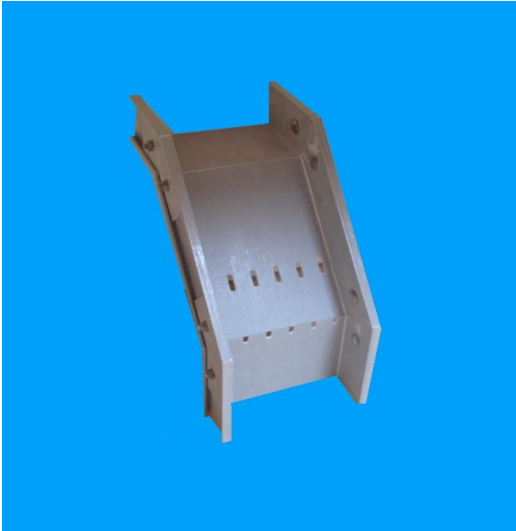

## Internal Risers

Cable Tray 90° Int Riser

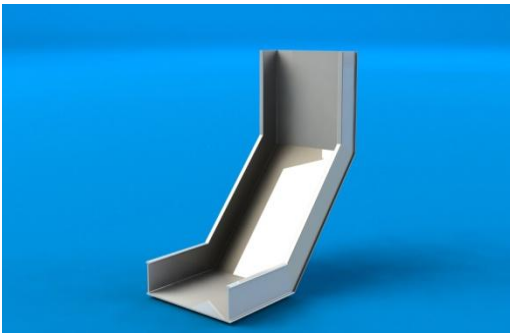

Cable Tray 45° Int Riser




# T-Piece

Product	Width	Height	Kg/each
GRPEQT-50-100	100mm	50mm	0.53
GRPEQT-50-150	150mm	50mm	0.64
GRPEQT-50-200	200mm	50mm	0.86
GRPEQT-50-300	300mm	50mm	1.31
GRPEQT-80-100	100mm	80mm	0.68
GRPEQT-80-150	150mm	80mm	0.83
GRPEQT-80-200	200mm	80mm	1.01
GRPEQT-80-300	300mm	80mm	1.46



# Reducer

Product	Width	Height	Kg/each
GRPRED-50-100	100mm	50mm	0.53
GRPRED-50-150	150mm	50mm	0.64
GRPRED-50-200	200mm	50mm	0.86
GRPRED-50-300	300mm	50mm	1.31
GRPRED-80-100	100mm	80mm	0.68
GRPRED-80-150	150mm	80mm	0.83
GRPRED-80-200	200mm	80mm	1.01
GRPRED-80-300	300mm	80mm	1.46

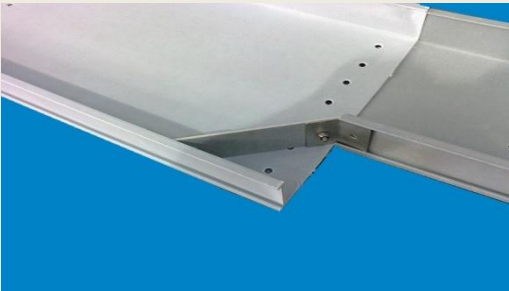



# GRP Cable Troughs


## 150x110

Our Cable Ducting products have been designed and manufactured with the user in mind, whilst offering excellent performance ease of use.

The Cable Troughs can be supplied either as the Trough or with the uniquely designed 'Click-fit-Lid'. All our troughs are produced in 3mtr lengths and can easily be fabricated on/off site.

### Advantages

Corrosion Resistant	Impact Resistant	Dimension Stability
Strong & Light weight	Click Fit Lid System	UV Stability
Non-Conductive	Easy to fabricate	Excellent working temps

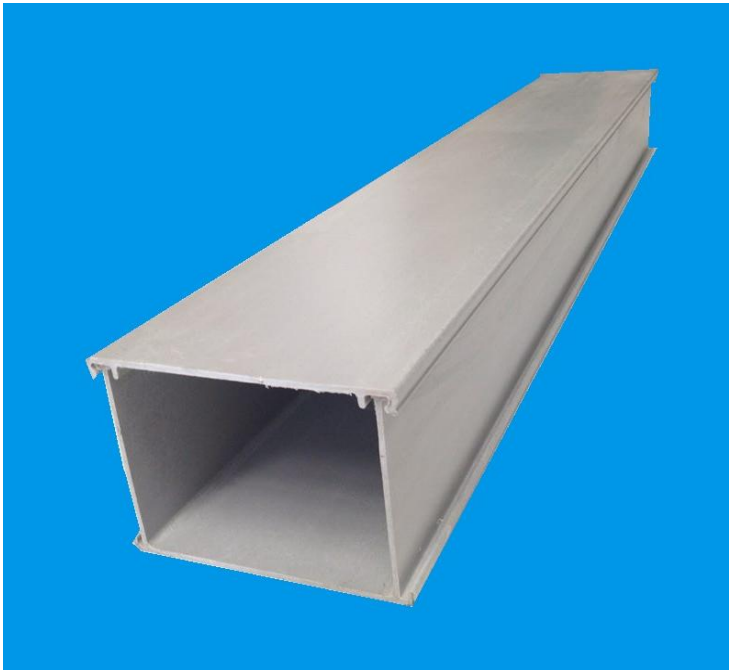

### Specifications

The cable trays are manufactured glass by the pultrusion process from isophthalic polyester thermosetting resin reinforced with E glass giving a high strength dimensionally accurate and thermally stable product. The pultruded sections fully comply with all the requirements of EN13706, grade E17 – Specification of pultruded profiles.

The standard polyester resin is a halogen free fire retardant grade satisfying the requirements of BS476 Pt7, Class 2 and ASTM E84 25 sec - Surface spread of flame. Higher grade fire retardant products can be manufactured to order including the high fire resistance, low smoke and low toxicity required by the London Underground (LUL).

Cable Troughs can also be made to order in the highly corrosion resistant vinyl ester resin. GRP cable troughs are normally electrical non-conductive but for those applications with risk explosive atmospheres an anti-static version is available to order.

# Recycled Plastic Cable Troughs



The cable trenches have been developed for a number of customers but we found initial success supplying these products into Swedish Rail, where they were used to protect fibre optic communication cables, Deutsche Bahn and other European communication and rail companies.

### Specifications

Each cable trough comprises the trough and a cover designed to fit into the trough. They are made from a mixture of recycled plastics primarily polyolefin's (polyethylene, polypropylene etc). These materials demonstrate good resistance performance to acids, alkalis, fuel oils, petrol, mineral oils and other common substances and offer good UV stability and weathering performance. They have high mechanical strength and have been used to protect HV, LV and communication cables against mechanical damage. They have been tested to various European Norm specifications. All troughs can be supplied with locks to prevent theft and when being laid are designed to interlock with the covers being installed in a manner to overlay the locked joints to add further protection to the cables

Product	Size	Production
Cable Trough	100x100x1mtr	150 units per day
Lid	100x1mtr	
Cable Trough	130x130x1mtr	
Lid	130x1mtr	
Cable Trough	200x130x1mtr	
Lid	200 x 1mtr	

- Lightweight no cranes
- Modular self aligning with secure lids
- Fire Rated Zero
- 100% Recycled
- 100% recyclable
- Impact resistant at -40°C
- 40 Tonne dynamic load capacity
- Max width 500mm



# GRP Cable Ladders

GRP Cable Trays at a glance		
	Standard	Alternative
Material	ISO Polyester Resin	
Fire Rating	Class 2 Fire Rated	Modar
Length	3000mm	6000mm
Width	150mm – 1000mm	
Height	100mm	150mm



GRP Cable Ladders are supplied from stock in a range of standard sizes which allows them to accommodate almost all projects. Our ladders systems are designed to utilize space and to give cable protection. The design of the side profile combines great strength with light weight. All of our Cable Systems ladders have been designed to improve load-bearing capabilities. We are able to produce GRP Cable Ladders to a variety of sizes and special resin systems to match any working environment. We can also supply cable ladders dividers and lids if required. There are many advantages to using our GRP Cable Ladders:

- Light weight and easy to use
- Excellent UV stability and fire properties
- Various sizes available in the ladder profile
- Available in various resin systems offering excellent corrosion resistance
- Ladders are produced to NEMA standards
- Excellent strength properties under high loads

Product	Width	Height	Kg/mtr
GRPLDR-100-300/3	300mm	100mm	2.92
GRPLDR-100-450/3	450mm	100mm	3.21
GRPLDR-100-600/3	600mm	100mm	3.50
GRPLDR-100-700/3	700mm	100mm	3.68
GRPLDR-150-300/3	300mm	150mm	3.62
GRPLDR-150-450/3	450mm	150mm	3.91
GRPLDR-150-600/3	600mm	150mm	4.20
GRPLDR-150-700/3	700mm	150mm	4.38

Product	Width	Height	Kg/each
GRPLDR-90EB -100-300	300mm	100mm	3.02
GRPLDR-90EB-100-450	450mm	100mm	3.68
GRPLDR-90EB-100-600	600mm	100mm	4.35
GRPLDR-90EB-100-700	700mm	100mm	4.90
GRPLDR-90EB-150-300	300mm	150mm	3.72
GRPLDR-90EB-150-450	450mm	150mm	4.46
GRPLDR-90EB-150-600	600mm	150mm	5.24
GRPLDR-90EB-150-700	700mm	150mm	5.83


Product	Width	Height	Kg/each
GRPLDR-45EB-100-300	300mm	100mm	2.14
GRPLDR-45EB-100-450	450mm	100mm	2.44
GRPLDR-45EB-100-600	600mm	100mm	2.93
GRPLDR-45EB-100-700	700mm	100mm	3.13
GRPLDR-45EB-150-300	300mm	150mm	2.62
GRPLDR-45EB-150-450	450mm	150mm	2.93
GRPLDR-45EB-150-600	600mm	150mm	3.49
GRPLDR-45EB-150-700	700mm	150mm	3.84

# Cable Ladders



## Bends

Cable Ladder Flat Elbow 90

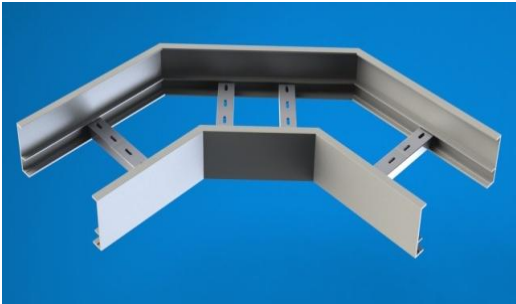

Cable Ladder Flat Elbow 45



# Internal Risers

Product	Width	Height	Kg/each
GRPLDR-90INTR-100-300	300mm	100mm	2.18
GRPLDR-90INTR-100-450	450mm	100mm	2.44
GRPLDR-90INTR-100-600	600mm	100mm	2.70
GRPLDR-90INTR-100-700	700mm	100mm	2.86
GRPLDR-90INTR-150-300	300mm	150mm	2.68
GRPLDR-90INTR-150-450	450mm	150mm	2.94
GRPLDR-90INTR-150-600	600mm	150mm	3.20
GRPLDR-90INTR-150-700	700mm	150mm	3.35

Product	Width	Height	Kg/each
GRPLDR45INTR-100-300	300mm	100mm	2.00
GRPLDR45INTR-100-450	450mm	100mm	2.26
GRPLDR45INTR-100-600	600mm	100mm	2.52
GRPLDR45INTR-100-700	700mm	100mm	2.68
GRPLDR45INTR-150-300	300mm	150mm	2.48
GRPLDR45INTR-150-450	450mm	150mm	2.74
GRPLDR45INTR-150-600	600mm	150mm	3.00
GRPLDR45INTR-150-700	700mm	150mm	3.15

Product	Width	Height	Kg/each
GRPLDR-TP-100-300	300mm	100mm	3.92
GRPLDR-TP-100-450	450mm	100mm	4.26
GRPLDR-TP-100-600	600mm	100mm	4.26
GRPLDR-TP-100-700	700mm	100mm	7.12
GRPLDR-TP-150-300	300mm	150mm	4.88
GRPLDR-TP-150-450	450mm	150mm	5.22
GRPLDR-TP-150-600	600mm	150mm	8.08
GRPLDR-TP-150-700	700mm	150mm	8.48

Cable Ladder Int Riser 90



Cable Ladder Int Riser 45




# T - Piece

Cable Ladder T-Piece



# GRP Uni Strut Profiles

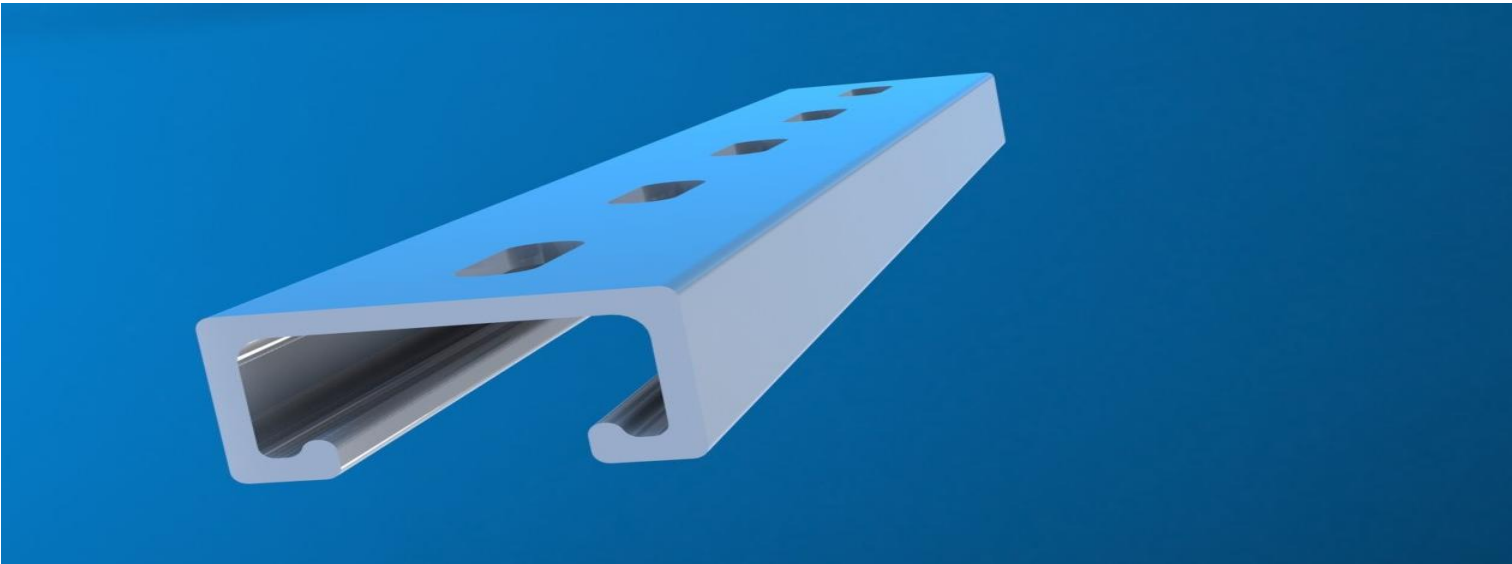

## GRP Unistrut type profile

### Product description

The 41x41x3.2mm mm grp uni-strut profile is made by the pultrusion process giving a section that is structurally strong and dimensionally consistent . The uni-strut profile matches the steel strut so that it takes the same shaped nuts, with and without springs that are widely available for the steel strut. The profile meets all the requirements of EN 13706 – Specification of grp profiles – Grade E17 and is manufactured under ISO 9000 registered quality control system. The profile is stocked in 6m lengths, colour grey. We also have the half strut available at 41mm x 25mm x 3mm

### Applications


The strut profile is electrically non-conductive and resistant to corrosion by water, salt and most chemicals.

Typical applications include:

- Support frames for cabinets holding electrical switchgear, process control instruments, etc
- Support for electrical cable trays and ladders
- Support for rooftop PV panels
- Support for pipes, conduits, etc

### Mechanical Properties

Full section modulus =19GPa measured by the method- EN 13706, Annex D  
Moment of inertia Ixx = 130,000mm4  
Bolt pull out strength with Zebidee nut - 2000N  
Concentrated Load at centre of span. Deflection limited to span/200

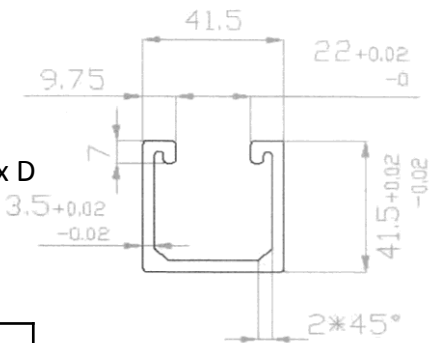


	Span mm			
	1000	1500	2000	2500
Load kg	150	65	38	25

# ISO Certification



# The Manufacturing Process

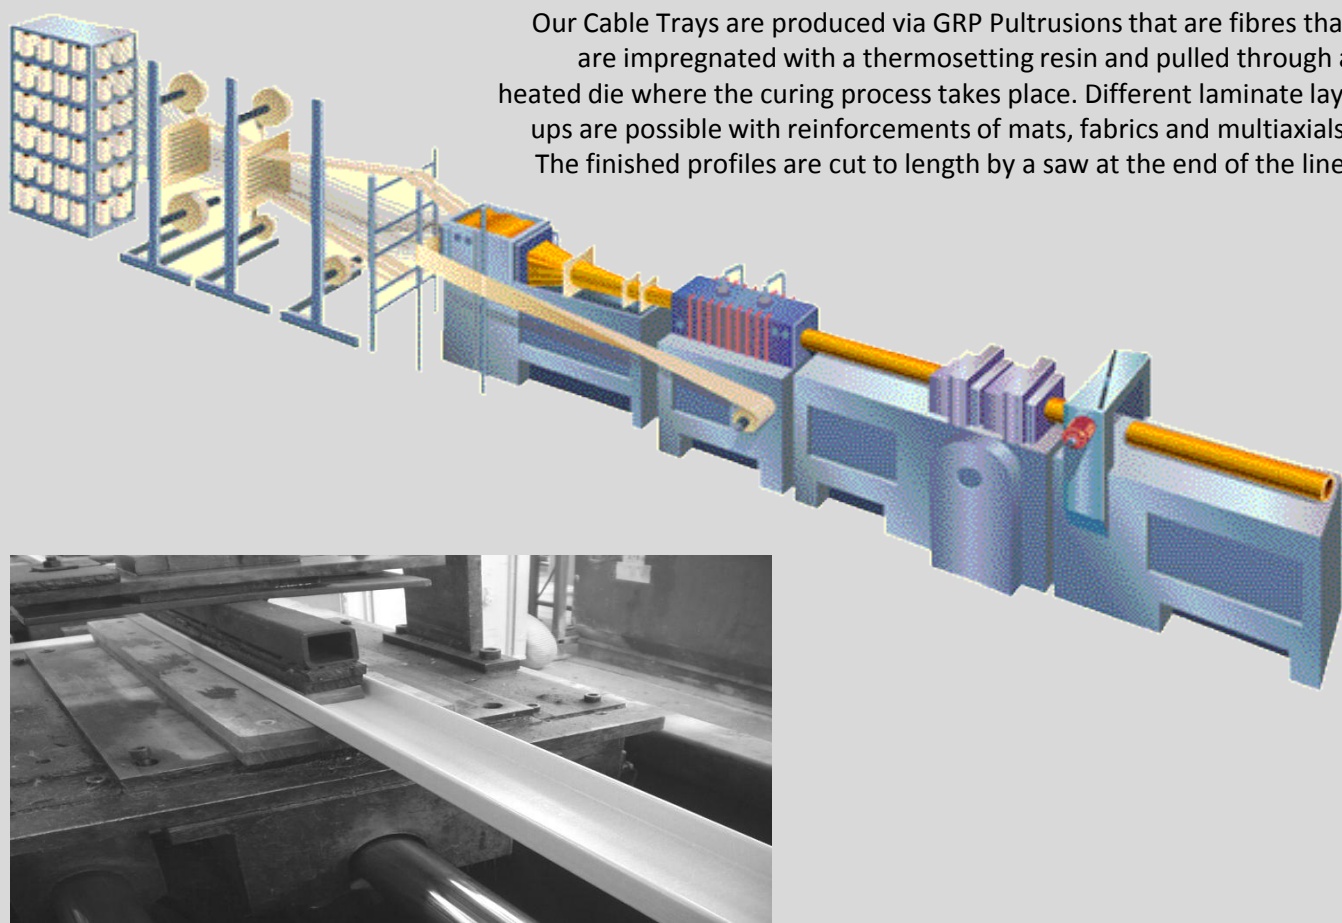


Our Cable Trays are produced via GRP Pultrusions that are fibres that are impregnated with a thermosetting resin and pulled through a heated die where the curing process takes place. Different laminate lay-ups are possible with reinforcements of mats, fabrics and multiaxials. The finished profiles are cut to length by a saw at the end of the line.



Cable Management PTY Ltd is an independently owned company that provides a range of speciality cable management products & solutions to the Mining, Heavy Industrial and Renewables markets across Africa. With extensive experience in the cable management and mechanical supports sectors, we provide a high level of technical support and advice on the latest innovations in system design, safety and value add applications. We offer extremely innovative solutions for even the most arduous & complex cable support application that would fall outside the scope of standard cable management products.

We distribute across the African continent and are able to service the most complex project site and remote locations. We also offer localised training on our products for all relevant applications.

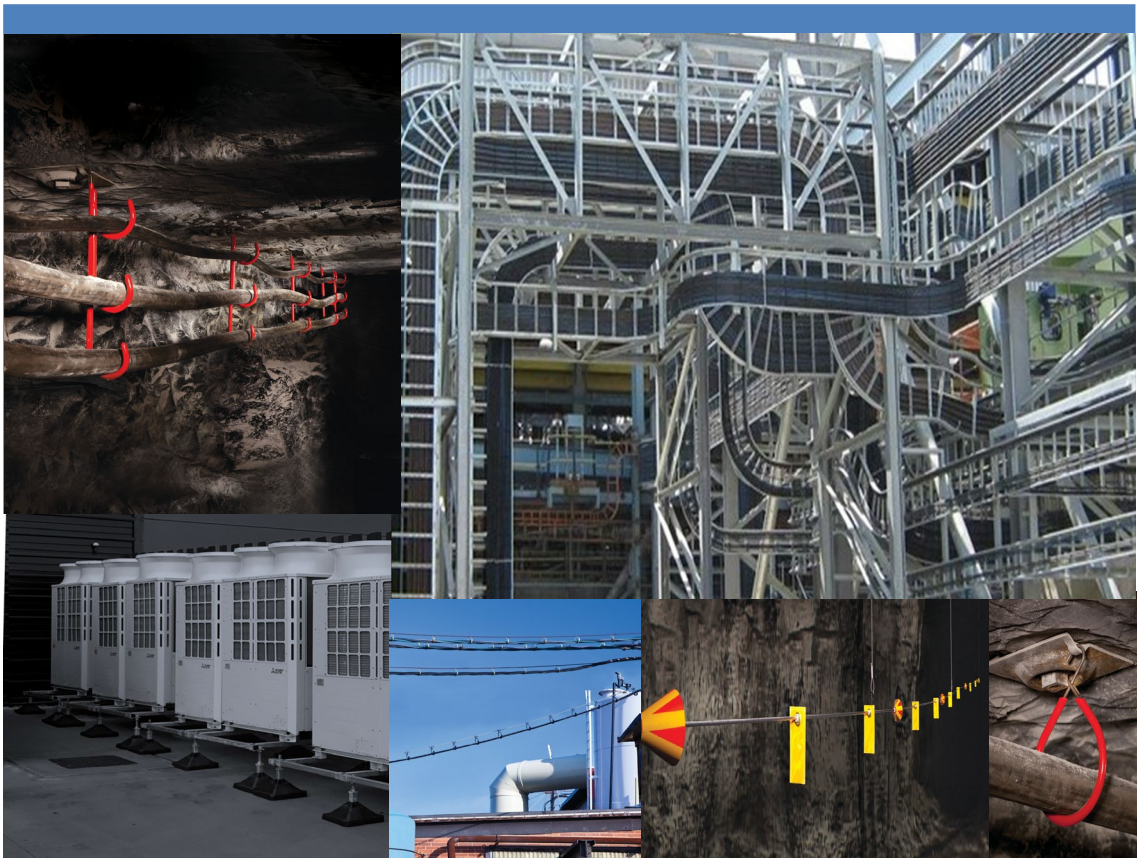

## Cable Management Pty Ltd

Tel: +27 87 379 7934    Whatsapp +27 72 195 9058  
sales@cablemanagement.co.za

Offices in Johannesburg & Cape Town

Distribution in Botswana, DRC, Ghana, Kenya, Malawi,  
Mozambique, Namibia, Tanzania, Uganda, Zambia, Zimbabwe.

**CM CABLE**  
MANAGEMENT  
cable support solutions

[www.cablemanagement.co.za](http://www.cablemanagement.co.za)